



GL20-3232ETN-M Digital Input and Output Module Equipment Guide



Industrial
Automation



New Energy
Vehicle



Intelligent
Elevator



Intelligent
Robot



Digital
Energy



Rail
Transit



Data code PS00021831A01

Legal Information

Copyright

Copyright © 2025 Shenzhen Inovance Technology Co., Ltd. All rights reserved.

This documentation is the exclusive property of Shenzhen Inovance Technology Co., Ltd. No individual or entity may excerpt, reproduce, modify, translate, or distribute any content herein without written consent from Inovance.

Legal action will be taken against infringement.

Trademarks

INOVANCE is a registered trademark of Shenzhen Inovance Technology Co., Ltd. and its affiliates. All other trademarks or registered trademarks mentioned in this documentation are the property of their respective owners. Unauthorized use of these trademarks by third parties for any purpose without written authorization could violate the rights of their owners.

Disclaimer of Liability

Due to continuous updates and improvements of products and technologies, the content of this documentation may not fully match the actual products. In the event of any discrepancies, the actual products shall prevail.

The contents are subject to change without notice due to product upgrade.

Waste Disposal

The storage, use, and disposal of this product (including optional accessories) must comply with local laws and regulations.

Qualified Personnel

The product/system described in this documentation may be operated only by personnel qualified for the specific task in accordance with the relevant documentation, in particular its warning notices and safety instructions. Qualified personnel can identify the risks of the product/system and prevent possible dangers.

Proper Use of the Product

Proper transportation, storage, assembly, installation, commissioning, operation, and maintenance are required to ensure the safe operation of the product without any problems. The required ambient conditions must be met. All operations must follow the guidelines provided in this documentation.

Preface

Introduction

This guide includes the product overview, model and nameplate, components, terminal wiring, as well as technical and environmental specifications of the module.

Target audience

This guide is primarily intended for the following engineers:

- Business development/Service engineers of Inovance
- Chief technical engineers of channel partners/end users
- Mechanical engineers of channel partners/end users
- Electrical engineers of channel partners/end users
- Software engineers of channel partners/end users
- Maintenance/Service engineers of channel partners/end users

Documentation guide

The product documentation package is organized into equipment guide and system guide, enabling you to quickly access the information as needed.

- Equipment guide: Contains a brief description of module properties, including model, components, technical specifications, and terminal wiring diagrams.
- System guide: Covers all typical application scenarios of the system, encompassing system introduction, installation, wiring, configuration and commissioning, troubleshooting, and maintenance.

Standard

The following table lists the certifications, directives, and standards that the product may comply with. For details about the acquired certificates, see the certification marks on the product nameplate.

| Certification | Directive | | Standard |
|----------------------|----------------|------------------------------------|---|
| CE certification | EMC directive | 2014/30/EU | 24 VDC products: EN 61131-2 220 VAC products: EN 61131-2 EN 61000-3-2 EN 61000-3-3 |
| | LVD directive | 2014/35/EU | EN 61010-1 EN 61010-2-201 |
| | RoHS directive | 2011/65/EU amended by (EU)2015/863 | EN IEC 63000 |
| UL/cUL certification | - | | UL 61010-1 UL 61010-2-201 CAN/CSA-C22.2 No. 61010-1 CSA C22.2 NO. 61010-2-201 |

| Certification | Directive | | Standard |
|--------------------|--------------------|--|---|
| KCC certification | - | | - |
| EAC certification | - | | - |
| UKCA certification | Safety regulations | Electrical Equipment (Safety) Regulations 2016 | EN 61010-1 EN 61010-2-201 |
| | EMC regulations | Electromagnetic Compatibility Regulations 2016 | 24 VDC products: EN 61131-2 220 VAC products: EN 61131-2 EN 61000-3-2 EN 61000-3-3 |
| | RoHS regulations | Directive (RoHS) Regulations 2012 | EN IEC 63000 |

More documents

| Document | Code | Description |
|---|------------|--|
| GL20 Series Module System Guide | PS00022010 | Covers all typical application scenarios of the system, providing detailed descriptions of system configuration, installation, wiring, commissioning, and troubleshooting. |
| GL20-3232ETN-M Digital Input and Output Module Equipment Guide (This guide) | PS00021831 | Includes the product overview, model and nameplate, components, terminal wiring, as well as technical and environmental specifications of the module. |

Revision history

| Date | Version | Revision |
|---------------|---------|--------------------|
| April 2026 | A01 | Minor corrections. |
| December 2025 | A00 | First release. |

Access to the guide

This guide is not delivered with the product. You can download the PDF version in the following ways:

- Visit <https://www.inovance.com/global>, and choose Service&Support > Support > Documentation Download.
- Scan the QR code on the product with your smart phone.
- Scan the QR code below to install My Inovance app, where you can search for and download the guide.



Warranty

Inovance provides warranty service within the warranty period (as specified in your order) for any fault or damage that is caused by proper operation of the user. Maintenance will be charged after the warranty expires.

Even within the warranty period, maintenance will be charged for the following product damage:

- Damage caused by operations not following the instructions in the guide
- Damage caused by fire, flood, or abnormal voltage
- Damage caused by using the product for unintended functions
- Damage caused by using the product outside the specified scope
- Secondary damage caused by force majeure (natural disaster, earthquake, lightning strike)

When applicable, relevant maintenance fee will be charged according to the latest Price List of Inovance. If otherwise agreed upon, the agreed terms and conditions shall prevail.

For details, see the Warranty Card.

1 Fundamental Safety Instructions

1.1 General Safety Instructions

Safety disclaimer

1. Read through the safety instructions before installing, operating, and servicing the equipment, and comply with these instructions.
2. To ensure personal and equipment safety, observe the notes indicated on the product labels and all the safety instructions in the user guide.
3. The "CAUTION", "WARNING", and "DANGER" are only supplements to the safety instructions.
4. Use this equipment according to the designated environment requirements. Damage caused by improper use is not covered by warranty.
5. Inovance shall take no responsibility for any personal injury or property damage caused by improper use.

Safety levels and definitions



DANGER

The "DANGER" sign indicates that failure to comply with the notice will result in severe personal injuries or even death.



WARNING






The "WARNING" sign indicates that failure to comply with the notice may result in severe personal injuries or even death.






CAUTION

The "CAUTION" sign indicates that failure to comply with the notice may result in minor or moderate personal injury or equipment damage.

| Unpacking | |
|-----------|---|
| | <p>WARNING</p> <ul style="list-style-type: none"> • Do not install the equipment if you find damage, rust, or signs of use on the equipment or accessories upon unpacking. • Do not install the equipment if you find water seepage or missing or damaged components upon unpacking. • Do not install the equipment if you find the packing list does not conform to the equipment you received. |
| | <p>CAUTION</p> <ul style="list-style-type: none"> • Check whether the packing is intact and whether there is damage, water seepage, dampness, and deformation before unpacking. • Unpack the package in accordance with the unpacking sequence. Do not hit the package with force. • Check whether there is damage, rust, or scratches on the surface of the equipment and equipment accessories upon unpacking. • Check whether the package contents are consistent with the packing list after unpacking. |


| Storage and transportation | |
|---|--|
|  WARNING | <ul style="list-style-type: none"> • Large-scale or heavy equipment must be transported by qualified professionals using specialized hoisting equipment. Failure to comply may result in personal injury or equipment damage. • Before hoisting the equipment, ensure that components such as the front cover and terminal blocks are secured firmly with screws. Loosely-connected components may fall off and result in personal injury or equipment damage. • Never stand or stay below the equipment when the equipment is being hoisted by the hoisting equipment. • When hoisting the equipment with a steel rope, ensure the equipment is hoisted at a constant speed without suffering from vibration or shock. Do not turn the equipment over or let the equipment stay hanging in the air. Failure to comply may result in personal injury or equipment damage. |
|  CAUTION | <ul style="list-style-type: none"> • Handle the equipment with care during transportation and mind your step to prevent personal injury or equipment damage. • When carrying the equipment with bare hands, hold the equipment casing firmly with care to prevent parts from falling. Failure to comply may result in personal injury. • Store and transport the equipment based on the storage and transportation requirements. Failure to comply can result in equipment damage. • Do not store or transport the drive in environments with water splash, rain, direct sunlight, strong electric field, strong magnetic field, and strong vibration. • Do not store the drive for more than three months. Long-term storage requires stricter protection and necessary inspections. • Pack the drive strictly before transportation. Use a sealed box for long-distance transportation. • Never transport the drive with other device or materials that may harm or have negative impacts on the drive. |
| Design | |
|  DANGER | <ul style="list-style-type: none"> • Design a safety circuit and add an error handling program in the software to ensure the product remains in a safe state upon external power failure or product faults. • Add an external fuse or circuit breaker because the module may smoke or catch fire due to long-time overcurrent caused by operation above rated current or load short-circuit. |
|  WARNING | <ul style="list-style-type: none"> • When the output units such as relays or transistors in this product are damaged, the output may become uncontrollable and remain continuously ON or OFF. • The product design must comply with the overvoltage category requirements specified in the environmental specifications. The power supply must have a system-level lightning protection device, assuring that overvoltage due to lightning shock cannot be applied to the power supply input terminals, signal input terminals, or output terminals, preventing equipment damage. • Make sure that measures have been taken to avoid malfunction caused by the communication faults between the product and related equipment, preventing personal injury or equipment damage. |
|  CAUTION | <p>Do not create, on the touch screen of the HMI, switches that may result in personal injury of the operator or equipment damage . Use independent switches for performing critical operations. Failure to comply may result in accidents caused by wrong outputs or faults.</p> |

| Installation | |
|---|--|
|  DANGER | <p>The equipment must be operated only by professionals with electrical knowledge. Non-professionals are not allowed.</p> |
|  WARNING | <ul style="list-style-type: none">• Read through the guide and safety instructions before installation.• Do not install this equipment in places with strong electric or magnetic fields.• Before installation, ensure that the mechanical strength of the installation site can bear the weight of the equipment. Failure to comply will result in mechanical hazards.• Before installation, ensure that the installation environment meets the specifications. Failure to comply will result in product damage.• Do not wear loose clothes or accessories during installation. Failure to comply may result in electric shock.• When installing the equipment in a closed environment (such as a cabinet or casing), use a cooling device (such as a fan or air conditioner) to cool the environment down to the required temperature. Failure to comply may result in equipment over-temperature or a fire.• Do not retrofit this product.• Never loosen the fixing bolts on components and modules, or any bolts marked in red.• The equipment shall be installed in a cabinet or terminal device. Protection measures such as a fireproofing shell, electric protection shell, or mechanical protection shell must be provided for the cabinet or terminal device. The IP level must meet IEC standards and local laws and regulations.• Before installing devices with strong electromagnetic interference, such as a transformer, install a shielding device for the equipment to prevent malfunction.• Install the equipment onto an incombustible object such as a metal. Keep the equipment away from combustible objects. Failure to comply will result in a fire.• For products not supporting hot swapping, disconnect all external power supplies of the system before installing/removing the product. Failure to comply may result in electric shock, module fault, or malfunction. |
|  CAUTION | <ul style="list-style-type: none">• Cover the top of the product with a piece of cloth or paper during installation. This is to prevent unwanted objects such as metal chippings, oil, and water from falling into the product and causing faults. After installation, remove the cloth or paper on top of the product to prevent over-temperature caused by poor ventilation due to blocked ventilation holes.• During installation, ensure the product is connected to the respective connector securely and hook the module firmly. Improper installation may result in malfunction, fault, or fall-off. |

Wiring



- The equipment must be operated only by professionals with electrical knowledge. Non-professionals are not allowed.
- Before wiring, switch off all power supplies of the device. Wait for at least the time designated on the equipment warning label before further operations because residual voltage still exists after power-off. Measure the DC voltage of the main circuit and make sure that it is below the safety voltage. Failure to comply can result in the risk of electric shock.
- Do not perform wiring, remove the equipment cover, or touch the circuit board with power on. Failure to comply can result in the risk of electric shock.
- Make sure that the equipment and product are grounded properly. Failure to comply can result in the risk of electric shock. Ground the equipment separately or to a single point. Common grounding must not be used.

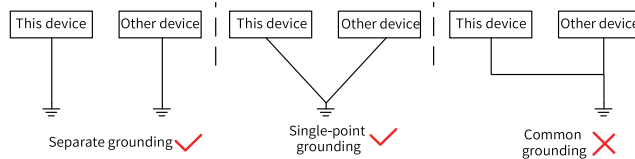

- Perform good insulation on terminals so that insulation distance between cables will not reduce after cables are connected to terminals. Failure to comply may result in electric shock or damage to the equipment.
- Install the terminal cover attached to the product before power-on or operation after wiring is completed. Failure to comply may result in electric shock.



- Never connect the power cable to output terminals of the equipment or product. Failure to comply may damage the equipment or even cause a fire.
- Cables used for wiring comply with the requirements for the cross sectional area and shielding. The shielding layer of the shielded cable must be reliably grounded at one end.
- Fix the terminal screws with the tightening torque specified in the user guide. Insufficient or excessive torque may cause overheating and damage of the joint, which could result in a fire.
- After wiring is done, check that all cables are connected properly and no screws, washers or exposed cables are left inside the equipment. Failure to comply may result in electric shock or equipment damage.














- Follow the proper electrostatic discharge (ESD) procedure and wear an anti-static wrist strap to perform wiring. Failure to comply may result in damage to the equipment or to the internal circuit of the product.
- Use shielded twisted pairs for the control circuit. Connect the shield to the grounding terminal of the equipment for grounding purpose. Failure to comply will result in equipment malfunction.

Power-on



- The equipment must be operated only by professionals with electrical knowledge. Non-professionals are not allowed.
- Before power-on, check that the equipment is installed and wired properly.
- Check that the power supply meets equipment requirements before power-on to prevent equipment damage or a fire.
- After power-on, do not open the cabinet door or protective cover of the equipment, touch any terminal, or disassemble any unit or component of the equipment. Failure to comply may result in death or personal injury.


| Power-on |
|---|
| <p> WARNING</p> <p>Perform a trial run after wiring to ensure the equipment operates safely. Failure to comply may result in personal injury or equipment damage.</p> |
| Operation |
| <p> DANGER</p> <ul style="list-style-type: none"> • The equipment must be operated only by professionals. Failure to comply can result in personal injury or death. • Do not touch any connecting terminals or disassemble any unit or component of the equipment during operation. Failure to comply can result in electric shock. |
| <p> WARNING</p> <ul style="list-style-type: none"> • Do not touch the equipment enclosure, fan, or resistor with bare hands. Failure to comply may result in personal injury. • Prevent metal or other objects from falling into the equipment during operation. Failure to comply may result in a fire or equipment damage. • During operation, do not bring live parts into contact with the metal enclosure of the product. Failure to comply may result in a fire or equipment damage. |
| <p> CAUTION</p> <ul style="list-style-type: none"> • Operate the product strictly within the required environmental conditions. Failure to comply may result in equipment fault or damage. • Touch the HMI panel with hands only during use. Do not use tools to touch the HMI panel. Invoiance assumes no responsibility for panel damage caused by excessive external force. <p>Safety recommendations</p> <ul style="list-style-type: none"> • In the position where the operator directly touches the machinery part, for example, where a machinery tool is loaded/unloaded, or where a machine runs automatically, manually-operated devices or similar must be installed independently of the product to start or stop the automatic operation of the system. • If you need to modify the program while the system is running, use the lock function or other protective measures. Ensure that only authorized personnel can make the necessary modifications. |
| Battery usage |
| <p> WARNING</p> <ul style="list-style-type: none"> • Do not use batteries that do not meet the product requirements. Failure to comply may result in death, personal injury, explosion, or fire. • Do not throw batteries into a fire or heat oven. Do not crush or cut the battery. Failure to comply may result in death, personal injury, explosion, or fire. • Do not expose the battery to extremely high temperatures. Failure to comply may result in death, personal injury, explosion, or fire. • Do not swallow the battery to prevent the risk of chemical burns. • If a button battery is swallowed by accident, seek medical treatment immediately. Failure to comply may result in severe internal burns within two hours and could result in death. |
| <p> CAUTION</p> <ul style="list-style-type: none"> • Keep the battery away from children. • If the battery compartment is not shut tight, stop using the device and keep it away from children. |

| Maintenance |
|---|
| <p> DANGER</p> <ul style="list-style-type: none"> • Maintenance and inspection must be carried out by personnel who have the necessary electrical training and experience. • Do not maintain the equipment with power ON. Failure to comply can result in electric shock. • Before maintenance, cut off all the power supplies of the equipment and wait for at least the time designated on the equipment warning label. • Disconnect all external power supplies of the system before cleaning the product or re-tightening screws on the terminal block or screws of the connector. Failure to comply may result in electric shock. • Disconnect all external power supplies of the system before removing the product or connecting/removing wirings. Failure to comply may result in electric shock or malfunction. |
| <p> WARNING</p> <p>Perform routine and periodic inspection and maintenance on the equipment according to maintenance requirements and keep a maintenance record.</p> |
| Repair |
| <p> DANGER</p> <ul style="list-style-type: none"> • Product repair must be carried out by personnel who have the necessary electrical training and experience. • Do not repair the equipment with power ON. Failure to comply can result in electric shock. • Before inspection and repair, cut off all the power supplies of the equipment and wait for at least the time designated on the equipment warning label. |
| <p> WARNING</p> <ul style="list-style-type: none"> • Submit the repair request according to the warranty agreement. • When the fuse is blown or the circuit breaker or earth leakage circuit breaker (ELCB) trips, wait as specified on the product warning sign before power-on or further operations. Failure to comply may result in personal injuries, equipment damage or even death. • When the equipment is faulty or damaged, require professionals to perform troubleshooting and repair by following repair instructions and keep a repair record. • Replace quick-wear parts of the equipment according to the replacement instructions. • Do not use damaged equipment. Failure to comply may result in death, personal injury, or severe equipment damage. • After the equipment is replaced, check the wiring and set parameters again. |
| Disposal |
| <p> WARNING</p> <ul style="list-style-type: none"> • Dispose of retired equipment in accordance with local regulations and standards. Failure to comply may result in property damage, personal injury, or even death. • Recycle retired equipment by observing industry waste disposal standards to avoid environmental pollution. • Dispose of retired batteries as industrial waste according to local laws and regulations. |

Safety Label

For safe equipment operation and maintenance, comply with the safety labels on the equipment. Do not damage or remove the safety labels. The following table describes the meaning of the safety labels.

To ensure safe operation, comply with equipment-related safety labels. The following table describes the meaning of the safety labels.

| Safety Label | Description |
|---|--|
|  | <ul style="list-style-type: none"> • Read through the safety instructions before operating the equipment. Failure to comply may result in death, personal injuries, or equipment damage. • Do not touch the terminals or remove the cover with power ON or within 10 min after power-off. Failure to comply will result in an electric shock. • The surface of the product may become very hot during operation. Do not touch these hot areas, as this may cause burns! |

1.2 工业信息安全

本产品提供接口连接到网络并通过网络接口传输数据。为了防止工厂、系统、机器和网络受到网络攻击，需要实施相应的工业信息安全保护机制，以确保工厂、系统、机器和网络的安全运行。

客户负责在产品 and 客户网络或任何其他网络之间提供并持续确保安全连接，防止其工厂、系统、机器和网络受到未经授权的访问。只有在安全连接并采取适当安全措施（例如，使用杀毒软件、安装防火墙）的情况下，才能将该系统、机器连接到企业网络或互联网。

INOVANCE汇川技术不断对产品和解决方案进行开发和完善以提高安全性。强烈建议您及时更新产品并始终使用最新产品版本。



Malware (such as viruses, Trojans, and worms) can bring the device into an unsafe operating state, resulting in death, serious injury, and property damage. Observe the following precautions strictly:

- Always use the latest software version. If the product version is no longer supported or the latest program version is not applied, customers are at increased risk of cyberattacks.
- Implement and maintain appropriate security measures (including but not limited to deploying anti-virus software, firewall, WAF, IPS/IDS, situational awareness system, ID verification, and data encryption) to prevent files in the removable storage device from being damaged by malware and to protect products, networks, systems, and interfaces from unauthorized access, disruption, intrusion, data leakage, or information theft.
- Check all safety-related interfaces and settings after commissioning.

2 Product Overview

The GL20-3232ETN-M digital input and output expansion module has 32 input channels and 32 output channels. It can be used with GL20 series communication interface modules (e.g., GL20-RTU-ECT32). Up to eight GL20-3232ETN-M modules can be used. The GL20-PS2 power supply module is required for more than eight GL20-3232ETN-M modules.

3 Model and Nameplate

Model Description

GL
20
-32
32
E
TN
-M

①
②
③
④
⑤
⑥
⑦

| | | | |
|---|--|---|---|
| <p>① Product Information</p> <p>GL: General local module</p> | <p>③ Number of I/O Channels</p> <p>32 input channels</p> | <p>⑤ Module type</p> <p>Logic I/O expansion module</p> | <p>⑦ Terminal type</p> <p>M: Ejector header (For the PUSHIN terminal, this item is empty by default)</p> |
| <p>② Series</p> <p>20: 20 series module</p> | <p>④ Number of I/O Channels</p> <p>32 output channels</p> | <p>⑥ Output Type</p> <p>Transistor output (sink)</p> | <p>-</p> |

Nameplate description



INOVANCE

GL20-3232ETN-M
32/32 Digital Input Output Module

POWER INPUT: DC24V 24 mA
OUTPUT: DC24V/0.5A RES LOAD SN:0123456789123456

QC PASSED

Certification

MANUAL www.inovance.com
Suzhou Inovance Technology Co., Ltd. Made in China


| | | | |
|---------|-------|-------|---------|
| 24V1/0 | 01/21 | 02/22 | 24V1/0 |
| COM1/0 | 03/23 | 04/24 | COM1/0 |
| DO37/17 | 05/25 | 06/26 | DO27/07 |
| ⋮ | ⋮ | ⋮ | ⋮ |
| DO31/11 | 17/37 | 18/38 | DO21/01 |
| DO30/10 | 19/39 | 20/40 | DO20/00 |







| | | | |
|---------|-------|-------|---------|
| • | 01/21 | 02/22 | • |
| SS1/0 | 03/23 | 04/24 | SS1/0 |
| DI37/17 | 05/25 | 06/26 | DI27/07 |
| ⋮ | ⋮ | ⋮ | ⋮ |
| DI31/11 | 17/37 | 18/38 | DI21/01 |
| DI30/10 | 19/39 | 20/40 | DI20/00 |

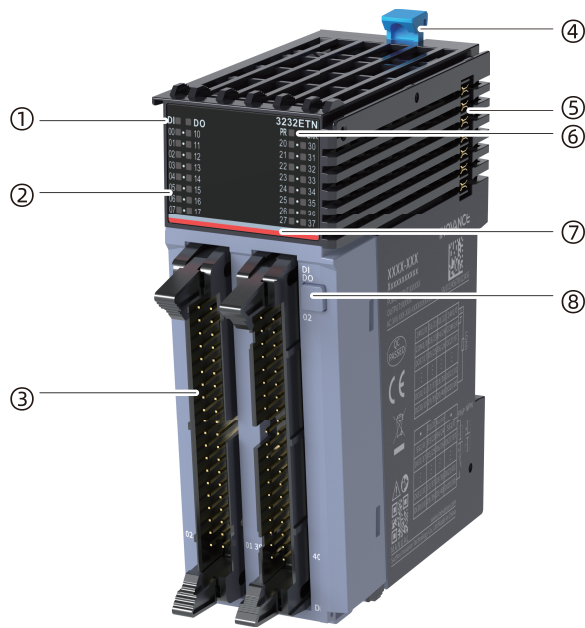Based on the above model and nameplate information, relevant ordering information of the product is provided in the following table.

| Model | Description | Product Code | Applicable Model |
|--------------------|---|--------------|---|
| GL20-3232ETN-M-INT | GL20 series module with 32-channel digital input and 32-channel NPN transistor output | 01441080 | Applicable to GL20 series communication interface modules (for example, GL20-RTU-ECT32) |

4 Components



| No. | Name | Description | | | |
|-----|-------------------------------|---|---------------------------|---|--|
| ① | DI/DO indicator | DI indicator ON indicates that the module is in input state, while DO indicator ON indicates that the module is in output state. | | | |
| ② | I/O signal indicator | ON: input/output active; OFF: input/output inactive | | | |
| ③ | Ejector header | 32 input channels and 32 output channels. For details, see “5.1 Terminal Assignment” on page 16 . | | | |
| ④ | Rail mounting latch | Used to secure the module to the DIN rail. | | | |
| ⑤ | Three-position terminal block | Used for backplane bus power supply and communication. | | | |
| ⑥ | Signal indicator | PR (POWER +RUN) | Power/Operation indicator | Yellow-green | <ul style="list-style-type: none"> Steady ON: The module is in normal operation. Fast flashing: The module is addressed successfully. Slow flashing: The module is powered on but not addressed. OFF: The module is not powered on or is faulty. |
| | | ERR | Fault indicator | Red | ON: The module is faulty. |
| ⑦ | Color identification |  | Red: Digital output |  | Orange: Analog output |
| | |  | Gray: Digital input |  | Green: Analog input |
| | |  | White: Communication |  | Blue: Other modules |
| ⑧ | DI/DO selection button | Switches the input/output state of the module. By default, the module is in the input state (DI indicator ON). When the button is pressed down, the DO indicator is switched ON and the DI indicator is switched OFF, indicating the module is in output state. | | | |


Note

- Fast flashing: ON for 200 ms and OFF for 50 ms (cyclic).
 - Slow flashing: ON for 200 ms and OFF for 1 s (cyclic).
-

5 Terminal Wiring

5.1 Terminal Assignment

The GL20-3232ETN-M module supports digital inputs and outputs. The display panel is equipped with DI and DO indicators. By default, the DI indicator is on to indicate the input state. When the DI/DO selection button is pressed down, the DO indicator is switched ON and the DI indicator is switched OFF, indicating the module is in output state.

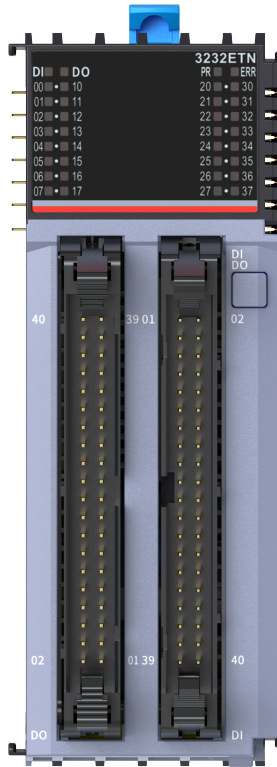

DI selected (input state)

| Left indicator | Left signal | Right terminal | | Right signal | Right indicator |
|----------------|-------------|----------------|----|--------------|-----------------|
| - | - | 1 | 2 | - | - |
| - | SS1 | 3 | 4 | SS1 | - |
| 37 | DI37 | 5 | 6 | DI27 | 27 |
| 36 | DI36 | 7 | 8 | DI26 | 26 |
| 35 | DI35 | 9 | 10 | DI25 | 25 |
| 34 | DI34 | 11 | 12 | DI24 | 24 |
| 33 | DI33 | 13 | 14 | DI23 | 23 |
| 32 | DI32 | 15 | 16 | DI22 | 22 |
| 31 | DI31 | 17 | 18 | DI21 | 21 |
| 30 | DI30 | 19 | 20 | DI20 | 20 |
| - | - | 21 | 22 | - | - |
| - | SS0 | 23 | 24 | SS0 | - |
| 17 | DI17 | 25 | 26 | DI07 | 07 |
| 16 | DI16 | 27 | 28 | DI06 | 06 |
| 15 | DI15 | 29 | 30 | DI05 | 05 |
| 14 | DI14 | 31 | 32 | DI04 | 04 |
| 13 | DI13 | 33 | 34 | DI03 | 03 |
| 12 | DI12 | 35 | 36 | DI02 | 02 |

| Left indicator | Left signal | Right terminal | | Right signal | Right indicator |
|----------------|-------------|----------------|----|--------------|-----------------|
| 11 | DI11 | 37 | 38 | DI01 | 01 |
| 10 | DI10 | 39 | 40 | DI00 | 00 |

DO selected (output state)

| Left indicator | Left signal | Left terminal | | Right signal | Right indicator |
|----------------|-------------|---------------|----|--------------|-----------------|
| - | 24V1 | 1 | 2 | 24V1 | - |
| - | COM1 | 3 | 4 | COM1 | - |
| 37 | DO37 | 5 | 6 | DO27 | 27 |
| 36 | DO36 | 7 | 8 | DO26 | 26 |
| 35 | DO35 | 9 | 10 | DO25 | 25 |
| 34 | DO34 | 11 | 12 | DO24 | 24 |
| 33 | DO33 | 13 | 14 | DO23 | 23 |
| 32 | DO32 | 15 | 16 | DO22 | 22 |
| 31 | DO31 | 17 | 18 | DO21 | 21 |
| 30 | DO30 | 19 | 20 | DO20 | 20 |
| - | 24V0 | 21 | 22 | 24V0 | - |
| - | COM0 | 23 | 24 | COM0 | - |
| 17 | DO17 | 25 | 26 | DO07 | 07 |
| 16 | DO16 | 27 | 28 | DO06 | 06 |
| 15 | DO15 | 29 | 30 | DO05 | 05 |
| 14 | DO14 | 31 | 32 | DO04 | 04 |
| 13 | DO13 | 33 | 34 | DO03 | 03 |
| 12 | DO12 | 35 | 36 | DO02 | 02 |
| 11 | DO11 | 37 | 38 | DO01 | 01 |
| 10 | DO10 | 39 | 40 | DO00 | 00 |


5.2 Wiring Diagram

Wiring precautions

- Do not bundle the extension cables with power cables (high voltage and high current) that produce strong interference signals, as this may increase noise, surges, and induction effects. Separate the extension cables from the power cables and avoid cabling in parallel.
- Use the recommended cables and adapter boards for connection. It is recommended that shielded cables be used as extension cables to enhance anti-interference capacity.
- Apply single-point grounding for the shield of shielded cables and soldered cables.

Circuit wiring diagram

- Input

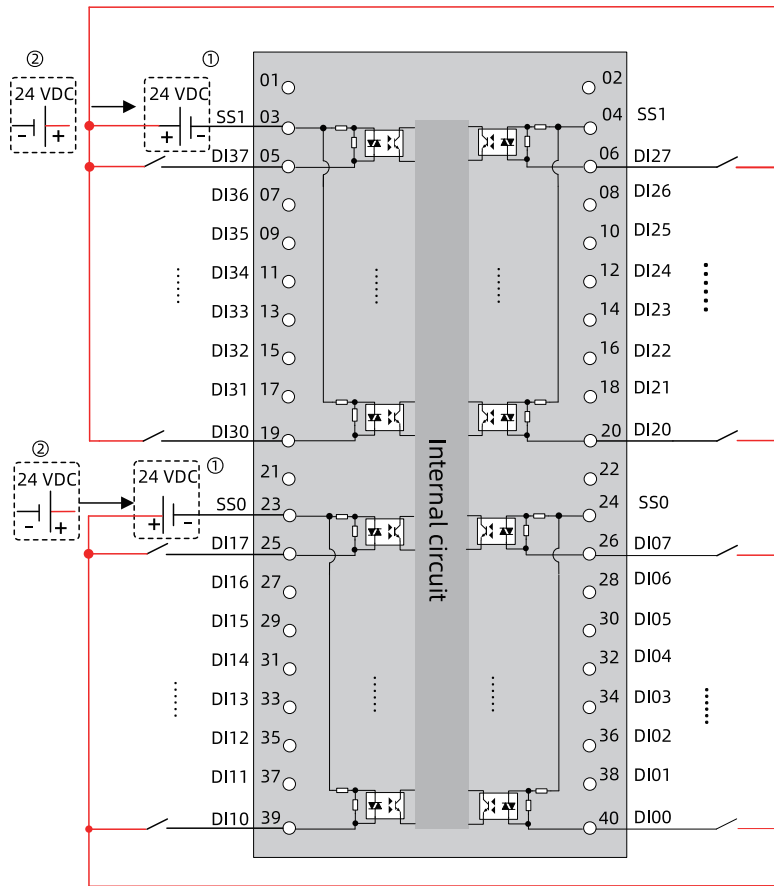


| No. | Description |
|-----|----------------------------|
| ① | Sourcing signal input mode |
| ② | Sinking signal input mode |

 **Caution**

- Terminals No. 05-20 and No. 25-40 are input terminals.
- Terminals No. 01, 02, 21, and 22 are unused terminals.
- Terminals No. 03 and 04 are common terminals SS1, which are internally connected. The common terminals can be connected to one or two 24 VDC power supplies.
- Terminals No. 23 and 24 are common terminals SS0, which are internally connected. The common terminals can be connected to one or two 24 VDC power supplies.

- Output

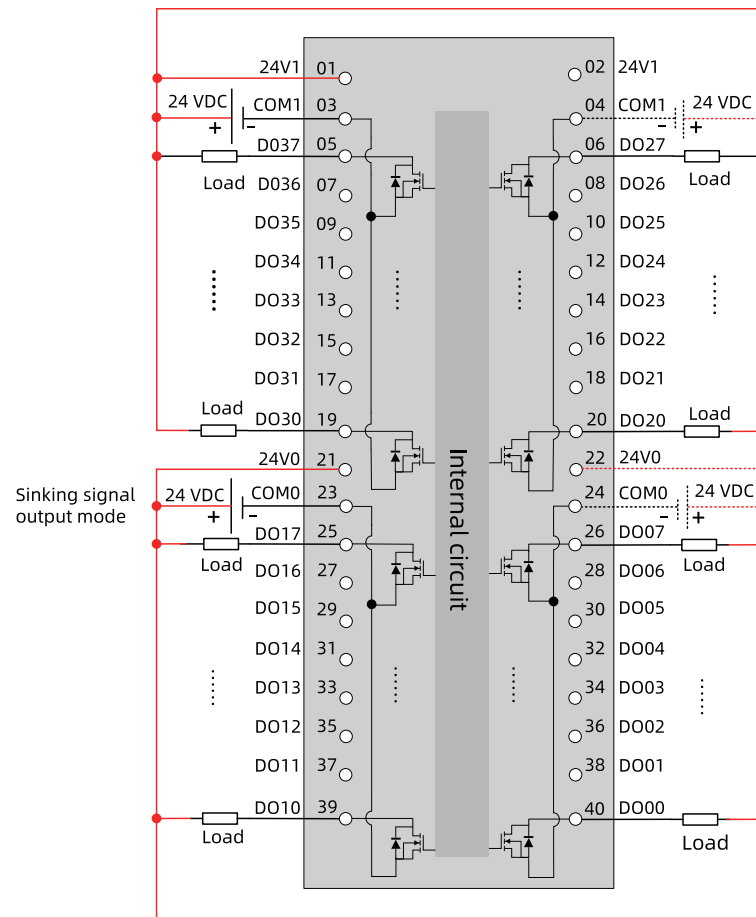

 **Caution**

- Terminals No. 05-20 and No. 25-40 are output terminals.
- Terminals No. 01 and 03. 02 and 04, 21 and 23, 22 and 24 are power supply terminals.
- Terminals No. 03 and 04 are common terminals SS1, which are internally connected. The common terminals can be connected to one or two 24 VDC power supplies.
- Terminals No. 23 and 24 are common terminals SS0, which are internally connected. The common terminals can be connected to one or two 24 VDC power supplies.

6 Technical Specifications

Mechanical specifications

| Item | Specification |
|------------------------|------------------------|
| IP rating | IP20 |
| Dimensions (W x H x D) | 36 mm x 100 mm x 75 mm |
| Weight | Approx. 164 g |

Power supply specifications

| Item | Specification |
|-------------------------------|-------------------------------|
| Rated bus input voltage | 5 VDC (4.75 VDC to 5.25 VDC) |
| Rated bus input current | 250 mA (typical@5 V) |
| Rated terminal input voltage | 24 VDC (20.4 VDC to 28.8 VDC) |
| Rated terminal input current | 100 mA (typical@24 V) |
| Rated terminal output voltage | / |
| Rated terminal output current | / |
| Hot swap | Not supported |

Input specifications

| Item | Description |
|---------------------------------|--|
| Input type | Digital input |
| Input mode | Source/Sink |
| Number of input channels | 32 |
| Input voltage class | 24 VDC±10% (21.6 VDC to 26.4 VDC) |
| Input current (typical) | 4 mA (typical@24 V) |
| ON-state voltage | 15 VDC |
| OFF-state voltage | < 5 VDC |
| Hardware response time (ON/OFF) | 100 µs/100 µs |
| Software filter time | Supported |
| Input impedance | Reference: 5.3 kΩ to 5.6 kΩ |
| Isolation | Yes |
| Input status display | The input indicator turns on (controlled by software) when the input is in drive state. |
| Input derating | The module operates at full load (with up to 32 simultaneously activated input channels) at 45°C and operates at 50% of full load (with up to 16 simultaneously activated input channels) at 55°C. |

Output specifications

| Item | Specification |
|------------------------------|-----------------------------------|
| Output type | Digital output, transistor output |
| Output mode | Sink |
| Number of output channels | 32 |
| Output voltage class | 24 VDC±10% (21.6 VDC to 26.4 VDC) |
| Output load (resistive load) | 0.5 A/channel; 8 A/module |
| Output load (inductive load) | 7.2 W/channel; 48 W/module |

| Item | Specification |
|---------------------------------|---|
| Output load (lamp load) | 5 W/channel; 36 W/module |
| Hardware response time (ON/OFF) | 100 μ s/100 μ s |
| OFF-state leakage current | 10 μ A |
| Switching frequency | Resistive load: 100 Hz; inductive load: 0.5 Hz; lamp load: 10 Hz |
| Isolation | Supported |
| Output action display | The output indicator turns on (controlled by software) when the output is in drive state. |
| Output derating | The module operates at full load at 45°C (with a total output current of up to 8 A when 32 output channels are activated simultaneously), and operates at 50% of full load at 55°C (with a total output current of up to 4 A when 32 output channels are activated simultaneously). |

Software specifications


| Item | Description |
|--|--|
| Input PDO data size | 4 bytes |
| Output PDO data size | 4 bytes |
| Output state mode during fault stop | Output zero, last value, or preset value |
| Preset output value during fault stop | 0 or 1 |
| Output terminal fault detection and indication | Not supported |
| Logic level configuration for output channels | Not supported |
| Independent channel configuration | Not supported |
| Diagnostic reporting function | Not supported |
| Output in stop mode | Output according to fault stop mode and preset values without refreshing |

7 Environmental Specifications

| Item | Specification |
|-------------------------------------|---|
| Installation/Operating environment | Free from conductive dust, conductive fibers, explosive dust, flammable gases, water mist/greasy dirt, corrosive dusts/gases, strong vibration, and repetitive shock |
| Altitude | ≤ 2000 m |
| Pollution degree | Level 2 |
| Immunity | 2 kV on power supply line (Conforms to IEC 61000-4-4) |
| Overvoltage category | I |
| EMC immunity level | Zone B, IEC61131-2 |
| Anti-static rating | Contact discharge +/-6 kV and air discharge +/-8 kV |
| Vibration resistance | <ul style="list-style-type: none"> • Application scenario: Tested according to IEC60068-2-6. 3.5 mm amplitude at 5 Hz to 8.4 Hz; 1 g acceleration at 8.4 Hz to 200 Hz; 10 cycles per axis. • Transportation scenario: Tested according to IEC60068-2-64, 0.01 g²/Hz power spectral density at 5 Hz to 100 Hz; 0.001 g²/Hz power spectral density at 200Hz; 1.14 g G_{rms} |
| Shock resistance | Application/Transportation scenario: Tested according to IEC60068-2-27; 15 g peak acceleration, 11 ms pulse width, 18 shocks in total in X, Y and Z axes |
| Operating temperature/humidity | <ul style="list-style-type: none"> • Temperature: -20°C to +55°C • Humidity: < 95% RH (30°C), without condensation |
| Storage temperature/humidity | <ul style="list-style-type: none"> • Temperature: -20°C to +60°C • Humidity: < 95% RH (30°C), without condensation |
| Transportation temperature/humidity | <ul style="list-style-type: none"> • Temperature: -40°C to +70°C • Humidity: < 95% RH (40°C), without condensation |

8 Dimension Drawing

The dimensions (in mm) are shown in the figure below.

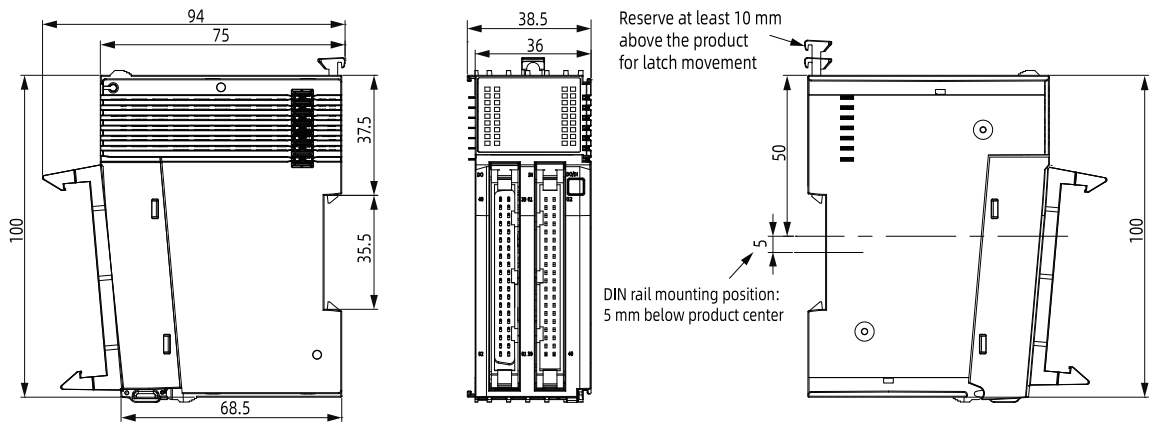

Service and Support

Should you encounter a safety accident during the use or operation of the product, or face challenges in operating and maintaining the equipment, which remain unresolved after the relevant documentation is consulted, we provide multiple channels to ensure prompt resolution:

- Channel #1: Contact service@inovance.com.
- Channel #2: Visit <https://www.inovance.com/global> to access document downloads, after-sales support, spare parts ordering, repair applications, and authenticity verification services.
- Channel #3: Download My Inovance app (<https://zshc-eu.inovance.com/download-pc/>) where you can access products info and documentation, and query product parameters.

We are committed to providing you with quick and professional technical support, and we look forward to your satisfaction and trust.



Copyright © Shenzhen Inovance Technology Co., Ltd.

PS00021831A01

Shenzhen Inovance Technology Co., Ltd.

www.inovance.com

Suzhou Inovance Technology Co., Ltd.

www.inovance.com

Add.: Inovance Headquarters Tower, High-tech Industrial Park,
Guanlan Street, Longhua New District,
Shenzhen 518000, P.R. China

Tel: (0755) 2979 9595

Fax: (0755) 2961 9897

Add.: No. 52, Tian E Dang Road, Wuzhong District, 215104,
Suzhou City, Jiangsu Province, P.R. China

Tel: (0512) 6637 6666

Fax: (0512) 6285 6720